

HIGT7700 SERIES DATA SHEET

Type	Frame Depth (inches)	Missile		Design Pressure (psf)		Water (psf)	Test Size* (inches)
		Large	Small	Pos (+)	Neg (-)		
TERRACE DOOR (OUTSWING)	2¾"	✓	✓	70	90	12	42 x 96

NOTE: The air infiltration and water resistance performance values provided above were achieved in a controlled lab environment. Performance of our products in the field will vary depending on product configurations, installation methods, and ambient conditions. AAMA 502 "Voluntary Specification for Field Testing of Newly Installed Fenestration Products" should be adhered to for testing installed products.

¹ U-values will vary depending upon glazing selected

GT7700 SERIES QUICK VIEW:


Highly energy efficient outswing terrace door for hurricane-impact resistance

STANDARD FEATURES

- Outswing terrace doors for hurricane-impact resistance
- 2¾" frame depth
- Surface mounted door stop
- Thermal strut technology for superior U-values
- Center gasketed for pressure equalization
- Euro-groove design for hardware versatility
- Multi-point locking
- 1" overall glazing

OPTIONAL FEATURES

- Door closer
- Dual finish (two-tone color) option
- Between-the-glass grids
- Additional locking points if desired

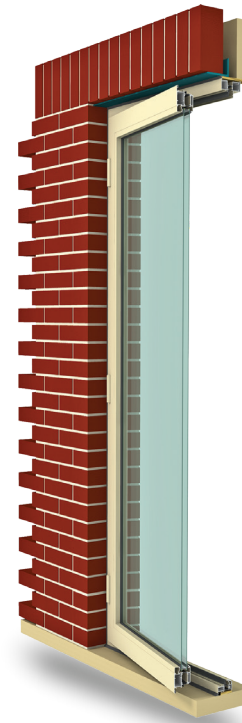

Window series: HIGT7700 Terrace Door — General Specifications & Details

- Tested To:
AAMA 506-16, ASTM E1886-12, ASTM E1996-17
- Max. Test size:
Terrace Door: 42" x 96"
- Materials:
All frame sections shall be thermally broken extruded aluminum shapes produced from commercial quality 6063-T6 alloy

- Finish Options:
AAMA 2603, 2604, & 2605, as well as powder coat and anodize finishes, are all available in a wide range of colors
- Accessories:
Wide range of panning & trim options available
- Installation Methods:
Trim & Clip
- Exceptions: Call Graham sales rep or see website for more information

Our products are tested to the standards of and certified by the American Architectural Manufacturer's Association and the National Fenestration Rating Council.

