


HIGT0900 SERIES DATA SHEET

| Type | Frame Depth (inches) | Missile | | Design Pressure (psf) | | Water (psf) | Test Size* (inches) |
|--------------------------|----------------------|---------|-------|-----------------------|---------|-------------|---------------------|
| | | Large | Small | Pos (+) | Neg (-) | | |
| Sliding Glass Door (OXO) | 4 | ✓ | | 70 | 70 | 0.13 | 144 x 96 |

NOTE: The air infiltration and water resistance performance values provided above were achieved in a controlled lab environment. Performance of our products in the field will vary depending on product configurations, installation methods, and ambient conditions. AAMA 502 "Voluntary Specification for Field Testing of Newly Installed Fenestration Products" should be adhered to for testing installed products. | * Contact Graham for available glazing and test configurations | * Performance values based on HIS0900

STANDARD FEATURES

- Sliding glass doors for hurricane-impact resistance
- Provides large missile hurricane-impact protection
- Offers passive protection from wind-borne debris without shutters
- Thermal-strutted frame and panels for superior energy savings
- Mulls to 4" fixed and operable products
- Adjustable stainless steel tandem rollers
- Stainless steel track cover
- Extruded surface mount pull handle
- Top-hung screen

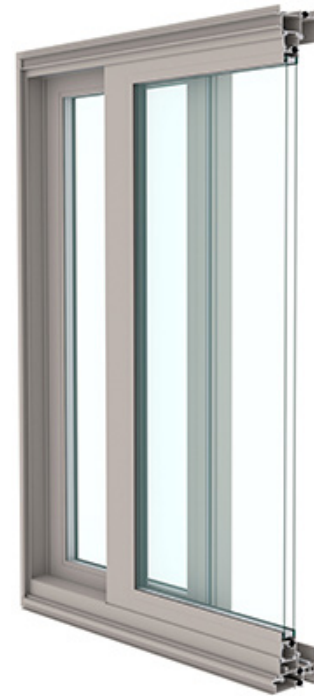

OPTIONAL FEATURES

- Dead bolt night lock
- Dual Finish (Two-Tone) option

Window Series: HIGT0900 Sliding Glass Door — General Specifications & Details

• Tested To:

TAS 201, TAS 202, TAS 203

• Max. Test Size:

12' x 8"

• Materials:

All frame sections shall be thermally broken extruded aluminum shapes produced from commercial quality 6063-T6 alloy

• Finish Options:

AAMA 2603, 2604, & 2605, as well as powder coat and anodize finishes, are all available in a wide range of colors

• Accessories:

Wide range of panning & trim options available

• Installation Methods:

Through-frame anchors at head and jambs; trim and clip at sill

• Exceptions: Call Graham sales rep or see website for more information

Our products are tested to the standards of and certified by the American Architectural Manufacturers Association and the National Fenestration Rating Council.

